



Bekina Boots
Footbeds



XMN1P/9180A EN ISO
20344:2022+A1:2024
EN ISO
20347:2022+A1:2024

midliteX

SOLIDGRIP

FEATURES


- anti-static
- cut resistant
- ladder grip in sole for extra security
- robust, yet lightweight
- wider fit
- excellent grip, even on wet and greasy surfaces (SRC certified)
- easy on & off thanks to kick-off spur
- resistant to fats, manure and a variety of chemicals



INNOVATION
THROUGH
CRAFTSMANSHIP

Size chart

EU 36 - 49 | UK 3.5 - 15 | US 4 - 16

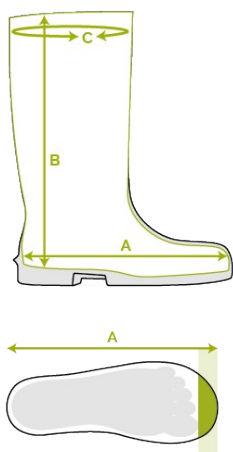


Please add an extra 0.4 inch for extra comfort or when wearing thick socks

Size EU	Size UK	Size US	A.		B.		C.	
			mm	inch	mm	inch	mm	inch
36	3.5	4	241	9.49	205	8.07	350	13.78
37	4	5	247	9.72	205	8.07	360	14.17
38	5	5.5	253	9.96	210	8.27	370	14.57
39	6	6	260	10.24	220	8.66	380	14.96
40	6.5	7	267	10.51	225	8.86	390	15.35
41	7	8	273	10.75	230	9.06	390	15.35
42	8	9	280	11.02	230	9.06	400	15.75
43	9	10	287	11.30	235	9.25	410	16.14
44	10	11	294	11.57	240	9.45	410	16.14
45	10.5	12	300	11.81	245	9.65	420	16.54
46	11	13	307	12.09	245	9.65	430	16.93
47	12	14	314	12.36	250	9.84	440	17.32
48	13	15	320	12.60	250	9.84	440	17.32
49	14	16	327	12.87	255	10.04	450	17.72

NEOTANE® TECHNOLOGY

NEOTANE® Technology is the combination of a unique blend of materials and the innovative way of processing it. The high performing NEOTANE® material has been developed based on over 60 years of experience and the feedback from millions of end users. For decades we have been working together with the best equipment suppliers guaranteeing us high quality products made with NEOTANE® Technology.

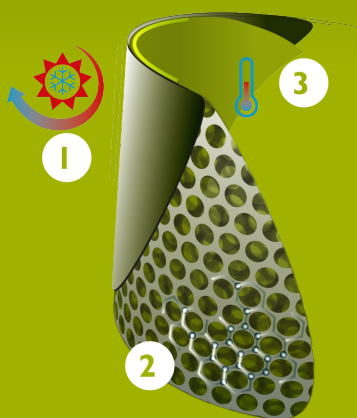

- 1 Sealed skin: strong and impermeable on the outside
- 2 Tiny air bubble structure: light and insulating
- 3 Self-regulating thermal process on the inside

MADE IN
BELGIUM

Since 1962



NEXT GEN TECHNOLOGY



LONG-LASTING COMFORT



INNOVATIVE SAFETY FEATURES



SUPERIOR SUSTAINABILITY



Bekina Boots nv • Berchemstraat 124 •
9690 Kluisbergen (BE)

+ 32 55 39 00 20 • info@bekina-boots.com • www.bekina-boots.com • Date/revised 5/9/2025

