



TECHNICAL DATA SHEET

StepliteX SolidGrip S5 green/black

General information

Size range

• EU	36 - 49
• UK	3.5 - 15
• US	4 - 16

The testresults in this technical datasheet are performed on size EU 42, UK 8, US 9.

Weight / pair

• Safety level: Steel toe cap & midsole	± 65.61 oz
---	------------

Colors



green - black

Upper

A. Dimensions

• Height	outer measure: 14.2 - 15.4 in
	cutting edge: 10.4 - 11.4 in
• Foot length	outer measure: 11.8 in
	inner measure: 11.0 in

B. Thickness

• Upper edge	0.10 - 0.12 in
• Calf	0.11 - 0.13 in
• Shinbone	0.11 - 0.14 in
• Ankle	0.17 - 0.21 in
• Heel	0.22 - 0.24 in

C. Raw material

NEOTANE (proprietary polyurethane compound)

D. Density


86.8 - 93.5 oz/gallon

E. Tensile strength		
(incl. lining)	1450 ± 290 psi	
F. Elongation		
(incl. lining)	600 +/- 100%	
G. Hardness		
	43 +/- 2 Sh A	
H. Tear strength		
(incl. lining) lbf/in	57.1 ± 11.4 lb/in	
I. Aging		
(incl. lining)	7 days at 158 °F	14 days at 158 °F
• Tensile strength	1682.4 psi	1305.3 psi
• Elongation	580 ± 20%	600 ± 20%
• Tear strength	65.1 lb/in	51.4 lb/in
J. Chemical resistance		
	see detailed list	
K. Environmental temperature		
• Maximum	± 212 °F	
• Minimum	Cold insulation down to -22 °F	

Lining

A. Material	
	PU coating on polyester fabric
B. Seams	
	Welded and knitted seams

Outsole profile

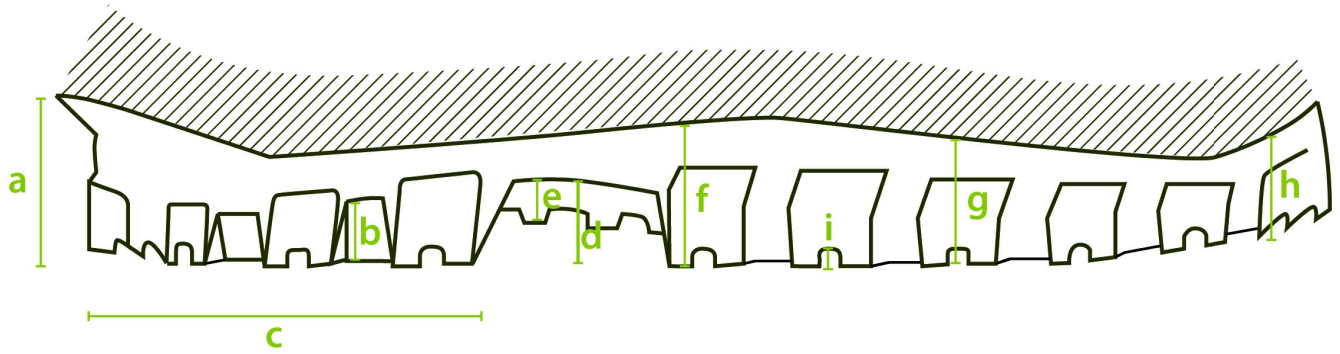

A. Dimensions

• Heel		
• Thickness	(a)	1.6 in
• Profile depth	(b)	0.57 in
• Length	(c)	4.0 in
• Width		3.4 in
• Middle foot		
• Height	(d)	0.65 in
• Ladder anti-slip grips	(e)	0.17 in
• Outsole		
• Thickness	(f)	1.3 in
	(g)	1.2 in
	(h)	0.87 in
• Profile depth	(i)	0.35 in

B. Raw material

	NEOTANE (proprietary polyurethane compound)
--	---

C. Density

	6.5 - 7.0 ppg (imp.)
--	----------------------

D. Mechanical characteristics

	See upper (E)-(F)-(H)
--	-----------------------

E. Energy absorption of the seat region

	30-40 J (requirement ≥ 20 J)
--	-----------------------------------

F. Antistatic

	dry: 1×10^8 - 1×10^9 Ohm
	wet: 1×10^7 - 1×10^9 Ohm

G. Abrasion resistance

	0.0031 in ³
--	------------------------

H. Hardness

	60 +/- 10 Sh A
--	----------------

I. Footwear slip resistance	
	SR
J. Chemical resistance	
	see detailed list

Safety

	Standard	Required	Type	Result
Toe cap & midsole				
Nail penetration resistance	EN ISO 20344:2022+A1:2024 EN ISO 20345:2022+A1:2024	> 1100 N	Metallic	1280 N
Impact resistance (200J)	EN ISO 20344:2022+A1:2024 EN ISO 20345:2022+A1:2024	> 0.55 in	Metallic	0.87 in
Impact resistance (125J)	CSA Z195-14	> 0.50 in	Metallic	0.71 in
Impact resistance at -0.4 °F (125J)	CSA Z195-14	> 0.50 in	Metallic	0.87 in
Compression resistance	EN ISO 20344:2022+A1:2024 EN ISO 20345:2022+A1:2024	> 0.55 in	Metallic	0.89 in
Compression resistance	ASTM F2413-18	> 0.50 in	Metallic	0.91 in
Width of toe cap	outer measure: 1.9 in			
Height of toe cap	outer measure: 3.7 in			
Toe cap	Steel			

Certificates

	EN ISO 20344:2022+A1:2024 EN ISO 20345:2022+A1:2024 2410090-02-86
	EN ISO 20345:2011 AB0321/19219-01/E00-00
	CSA Z195-14 70048629
	ASTM F2413-18 70048629
	AS 2210.3:2019 SMKH21341

Accessories

Thermo-moulded footbed

Two layers			
• Toplayer	woven textile		
• Color	black		
• Thickness	0.03 in		
• Bottom	PU foam		
• Color	black		
• Thickness	0.12 - 0.28 in		

Washable at 86 °F