




TECHNICAL DATA SHEET

RigliteX SolidGrip S5 brown/black

General information

Size range	
• EU	36 - 49
• UK	3.5 - 15
• US	4 - 16
The testresults in this technical datasheet are performed on size EU 42, UK 8, US 9.	
Weight / pair	
• Safety level: Steel toe cap & midsole	± 60.71 oz
Colors	
	
brown - black	

Upper

A. Dimensions	
• Height	outer measure: 10.4 - 11.6 in
• Foot length	outer measure: 11.8 in
	inner measure: 11.0 in
B. Thickness	
• Upper edge	0.15 - 0.17 in
• Calf	0.11 - 0.13 in
• Shinbone	0.11 - 0.14 in
• Ankle	0.17 - 0.21 in
• Heel	0.22 - 0.24 in
C. Raw material	
	NEOTANE (proprietary polyurethane compound)
D. Density	
	86.8 - 93.5 oz/gal (U.S.)

E. Tensile strength		
(incl. lining)	1450 ± 290 psi	
F. Elongation		
(incl. lining)	600 +/- 100%	
G. Hardness		
	43 +/- 2 Sh A	
H. Tear strength		
(incl. lining) lbf/in	57.1 ± 11.4 lbf/in	
I. Aging		
(incl. lining)	7 days at 158 °F	14 days at 158 °F
• Tensile strength	1682.4 psi	1305.3 psi
• Elongation	580 ± 20%	600 ± 20%
• Tear strength	65.1 lbf/in	51.4 lbf/in
J. Chemical resistance		
	see detailed list	
K. Environmental temperature		
• Maximum	± 212 °F	
• Minimum	Cold insulation down to -22 °F	

Pullers

A. Material	
	Synthetic leather


Binder

A. Material	
	Synthetic leather

Lining

A. Material	
	PU coating on polyester fabric
B. Seams	
	Welded and knitted seams

Outsole profile

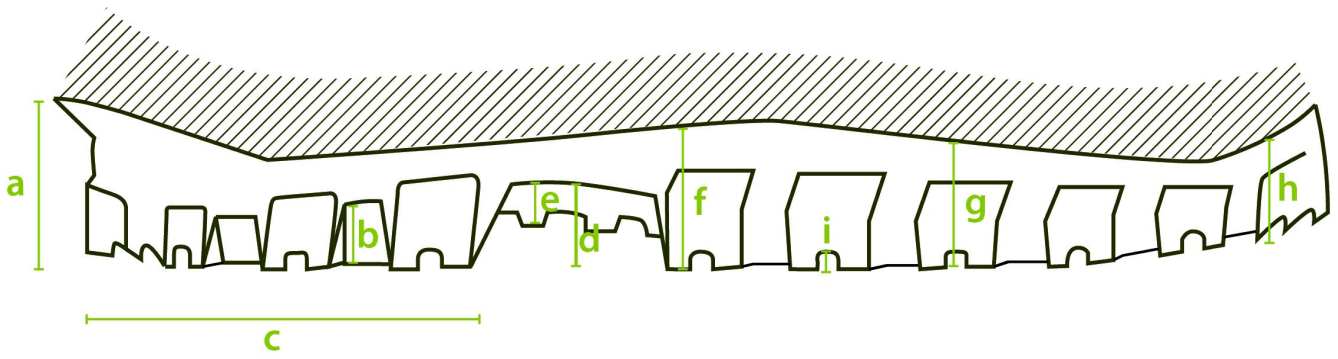

A. Dimensions

• Heel		
• Thickness	(a)	1.6 in
• Profile depth	(b)	0.57 in
• Length	(c)	4.0 in
• Width		3.4 in
• Middle foot		
• Height	(d)	0.65 in
• Ladder anti-slip grips	(e)	0.17 in
• Outsole		
• Thickness	(f)	1.3 in
	(g)	1.2 in
	(h)	0.87 in
• Profile depth	(i)	0.35 in

B. Raw material

NEOTANE (proprietary polyurethane compound)

C. Density

6.5 - 7.0 ppg (imp.)

D. Mechanical characteristics

See upper (E)-(F)-(H)

E. Energy absorption of the seat region

30 J (requirement ≥ 20 J)

F. Antistatic

dry: $1 \times 10^8 - 1 \times 10^9$ Ohm

wet: $1 \times 10^7 - 1 \times 10^9$ Ohm

G. Abrasion resistance

0.0031 in³

H. Hardness




60 +/- 10 Sh A

I. Footwear slip resistance	
	SR
J. Chemical resistance	
	see detailed list


Safety

	Standard	Required	Type	Result
Toe cap & midsole				
Nail penetration resistance	EN ISO 20344:2022+A1:2024 EN ISO 20345:2022+A1:2024	> 1100 N	Metallic	1280 N
Impact resistance (200J)	EN ISO 20344:2022+A1:2024 EN ISO 20345:2022+A1:2024	> 0.55 in	Metallic	0.79 in
Impact resistance (125J)	CSA Z195-14	> 0.50 in	Metallic	0.63 in
Impact resistance at -0.4 °F (125J)	CSA Z195-14	> 0.50 in	Metallic	0.83 in
Compression resistance	EN ISO 20344:2022+A1:2024 EN ISO 20345:2022+A1:2024	> 0.55 in	Metallic	0.89 in
Compression resistance	ASTM F2413-24	> 0.50 in	Metallic	0.91 in
Width of toe cap	outer measure: 1.9 in			
Height of toe cap	outer measure: 3.7 in			
Toe cap	Steel			

Certificates

	EN ISO 20344:2022+A1:2024 EN ISO 20345:2022+A1:2024 1910405-02-86
	EN ISO 20345:2011 AB0321/19213-01/E00-00
	CSA Z195-14 70048629
	ASTM F2413-24 70048629

Accessories

Thermo-moulded footbed			
Two layers			
• Toplayer	woven textile		
• Color	black		
• Thickness	0.03 in		
• Bottom	PU foam		
• Color	black		
• Thickness	0.12 - 0.28 in		
Washable at 86 °F			

